

HEATED SELF-SERVICE DISPLAY

SPECIFICATIONS

Model: V 100 LS 5 PULSE

Manufacturer :



PERFORMANCE

5 stainless steel heated levels including 4 presentation shelves.
 Led lighting on the entire showcase.
 Double recovery technology and air circulation all around the hot packaged products.
 The display is kept at legal temperature by a hot air curtain on the front and each shelf is ventilated and regulated.
 Regulation by thermostat from 68°F to 194°F (display on customer side) and regulatory temperature maintenance of 140°F guaranteed at the heart of the products.

ERGONOMIC

Tempered glass retainer on each shelf
 4 casters including 2 with brakes.

A BEAUTIFUL DESIGN

Right and left side windows for panoramic mirror effect

OPTIONS

20° Inclined stainless steel shelf



SAFETY

Tempered glass protection.



POWER SUPPLY

Standard: 208 V Triphase
 18.9 Amps
 6.8 Kw




HEATED SELF-SERVICE DISPLAY

SPECIFICATIONS


Model: **V 100 LS 5 PULSE**



SIDE VIEW

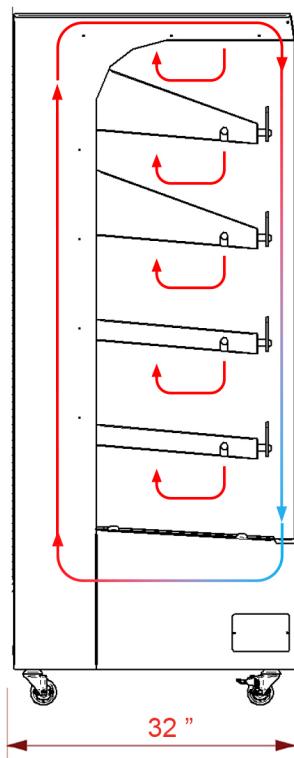

FRONT VIEW

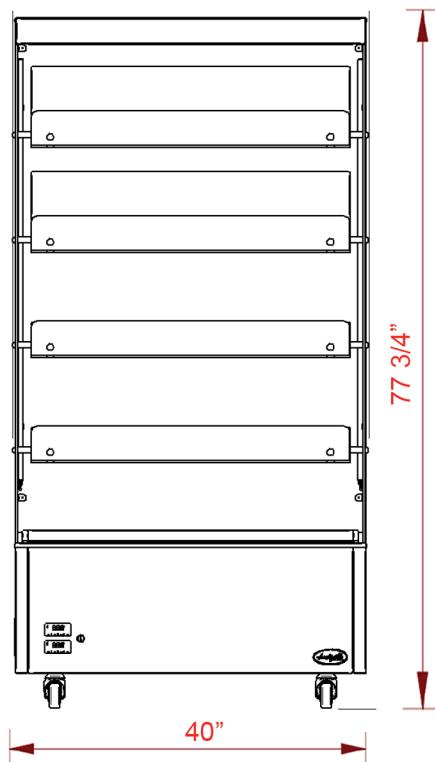

References	Width	Depth	Height	Voltage	Plug	Power
	40"	32"	77 3/4"	208 V Triphase	18.9 A	6.8 Kw