

HEATED SELF-SERVICE DISPLAY

SPECIFICATIONS

Model: **V 100 LS 3 PULSE**



PERFORMANCE

3 stainless steel heated levels including 2 presentation shelves. Individual LED lighting and tempered glass protection. Regulated and ventilated shelves thanks to 'FORCED AIR' technology to keep products warm and packed at legal temperature.

Our hot display cases are approved and guarantee that hot food is kept at 140°F temperature.

The unit is maintained at the legal temperature by a curtain of hot air in the front.

Regulation by thermostat (front display facing customers).



ERGONOMIC

Side tempered glass windows for panoramic view .
4 casters including 2 with brakes.

OPTIONS

Glass Door at the back for easy loading from the work area

Glass Door on the front to protect the hot food.

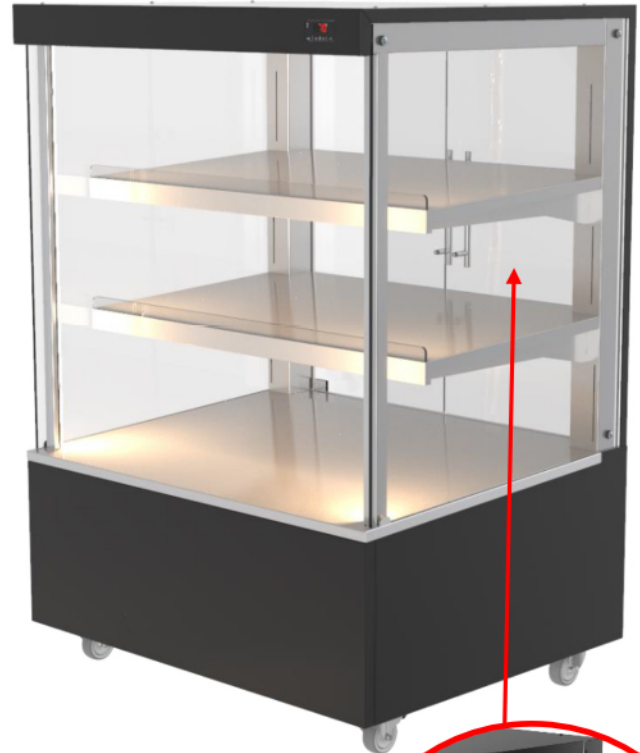

POWER SUPPLY

- Standard: 220V Single Phase
- 7 Amps
- 5000 Watts

SAFETY

Tempered glass protection.



HEATED SELF-SERVICE DISPLAY

SPECIFICATIONS


Model : **V 100 LS 3 PULSE**

Manufacturer :



FRONT VIEW

SIDE VIEW

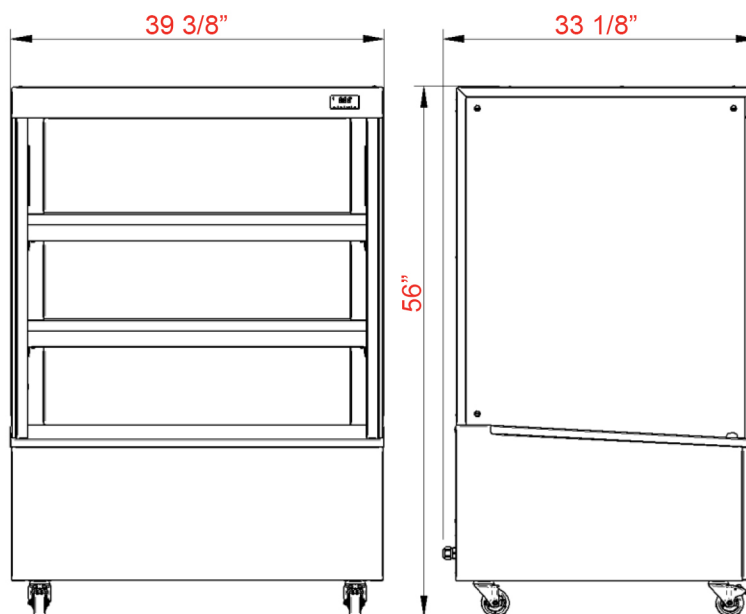

Crated Weight: 457 lbs

References	Width	Depth	Height	Voltage	Plug	Power
V 60 LS 5 PULSE	39 3/8"	33 1/8"	56"	220 V Single Phase	7 A	5 Kw