

HEATED SELF-SERVICE DISPLAY

SPECIFICATIONS



Model: V 60 LS 5 PULSE

PERFORMANCE

5 stainless steel heated levels including 4 presentation shelves.
Individual LED lighting and tempered glass protection.
Regulated and ventilated shelves thanks to 'FORCED AIR' technology to keep products warm and packed at legal temperature.
Our hot display cases are approved and guarantee that hot food is kept at 140°F temperature.
The unit is maintained at the legal temperature by a curtain of hot air in the front. Regulation by thermostat (front display facing customers).

ERGONOMIC

Side tempered glass windows for panoramic view .
4 casters including 2 with brakes.

OPTIONS

Glass Door on the front to protect the hot food.

Glass Door at the back for easy loading from the work area



POWER SUPPLY

- Standard: 220V Single Phase
- 18.3 Amps
- 4200 Watts



SAFETY

Tempered glass protection.

HEATED SELF-SERVICE DISPLAY


SPECIFICATIONS

Model : **V 60 LS 5 PULSE**


Manufacturer :



SIDE VIEW

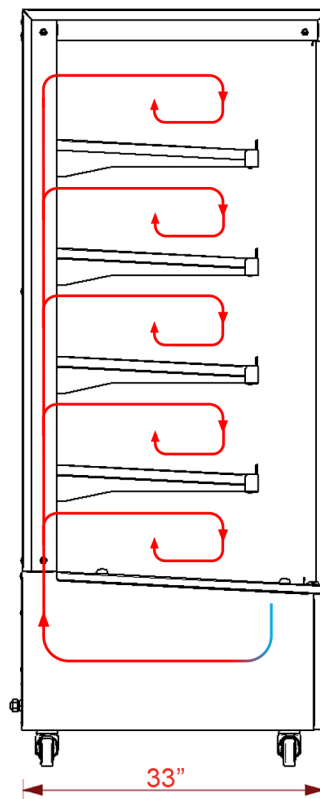

FRONT VIEW

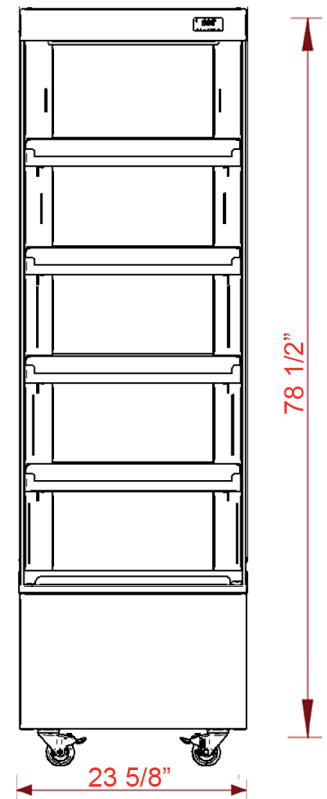

References	Width	Depth	Height	Voltage	Plug	Power
V 60 LS 5 PULSE	23 5/8"	33"	78 1/2"	220 V Single Phase	18.3 A	4.2 Kw