

1515 DESIGN

MAG 40/6 S GAS

18 to 24 chickens per hour



GAS



SPIT

Manufacturer :



DESIGN

Stainless Steel design with powerful lighting system.
Glass-ceramic protected quartz lighting.



COOKING SYSTEM

6 spits 6 motors, 5 radiant burners.

Adjustable spits allow to cook any type of products from chicken to turkey, lamb, beef and vegetables.

A variety of attachments are also available such as basket spits and chicken spits.

Our rotisserie ingenious spit adjustment guarantees a perfect cooking regardless of the size of the product.

Individual motors.

Manual pilots.

CLEANING

Easy to clean and safe to maintain.

Splash guard for each burner.

Removable burner panels.

Drain valve.



PERFORMANCE

Fast and consistent from 18 to 24 chickens capacity in less than an hour.

The unique individual burner system provides exceptional control and unmatched durability.

Patented prong-less spits.

Stainless Steel burner panels.

Cart on casters with brakes optional.

COLORS

STANDARD

■ Signal Black
(RAL 9004)

OPTIONS

■ Purple Red (RAL 3004)

■ Traffic Red (RAL 3016)

■ Gentian Blue (RAL 5010)

■ Stainless Steel

MAG 40/6 S GAS



1515 Design & Manufacturing

405 N. Oak Street, Inglewood CA 90302

Toll free (888) 671 0360 - Tel. (310) 671 0345 - Fax (310) 680 2879

E-mail : info@1515design.com Website : www.1515design.com

1515 DESIGN

MAG 40/6 S GAS

18 to 24 chickens per hour



GAS




SPIT


Manufacturer :




TOP VIEW

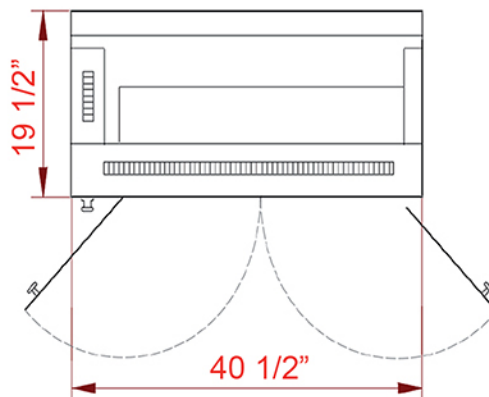

SIDE VIEW

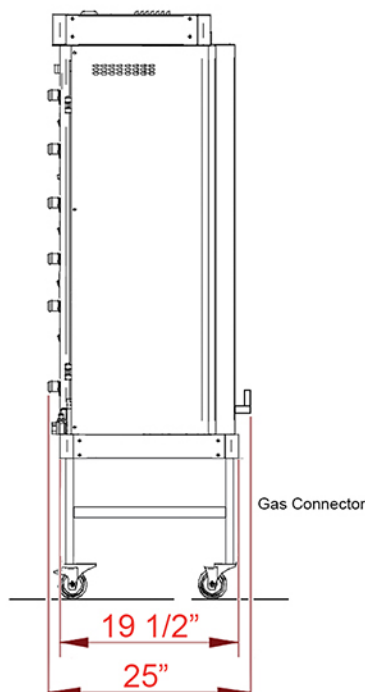

FRONT VIEW

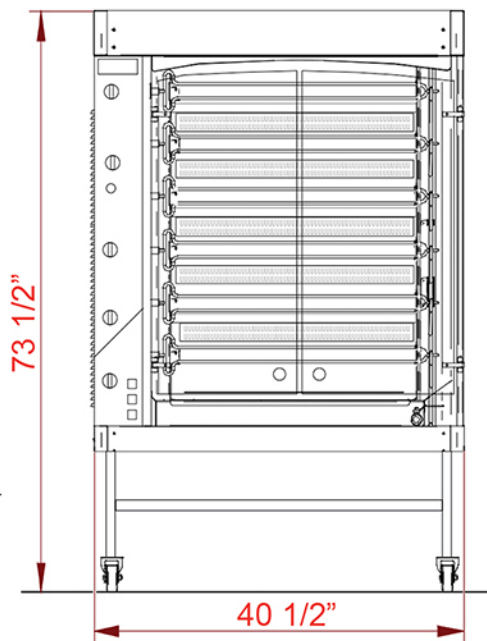

G	3/4" NPT Male Connection, 61 1/8" AFF
E	4.0 Amps, 208/220 V Single Phase

Gas Consumption	100,000 BT/hr (Natural gas) 90,000 BTH/hr (Propane)	STANDARD FEATURES
Gas Min. Pressure	7" W.C (Natural gas) 11" W.C (Propane)	STD finish : Stainless steel with all Stainless steel trims
Gas Connector	3/4"	6 spits, 6 motors, 5 radiant burners
Electricity	4.0 Amps, 208/220 V Single Phase	Bottom drip pan with drain valve
Capacity	Up to 18 with 3lbs Chicken Up to 24 with 2lbs Chicken	2 Tempered glass doors
Warranty	1 Year parts and labor	Manual Pilots and Individual Motors
Venting	The rotisserie requires a type 1 grease type hood installed in accordance with all national and local codes	208 / 220 V Single Phase
Min. Clearance	6" on the right, left and rear side	
Shipping Weight	500 lbs crated	

MAG 40/6 S GAS



1515 Design & Manufacturing

405 N. Oak Street, Inglewood CA 90302

Toll free (888) 671 0360 - Tel. (310) 671 0345 - Fax (310) 680 2879

E-mail : info@1515design.com Website : www.1515design.com